




# FOCUS GX ATX 3.0



## SPECIAL FEATURES

- ❖ ATX 3.0 and PCIe 5.0
- ❖ High Efficiency, 80 PLUS® Gold Certified
- ❖ Fully Modular Cabling Design
- ❖ Native 12VHPWR cable
- ❖ Compact Size (140 mm)
- ❖ 135 mm Fluid Dynamic Bearing (FDB) Fan
- ❖ Seasonic Digital Fan Control
- ❖ Highly Reliable Japanese 105 °C Aluminum Electrolytic Capacitors
- ❖ Tight Voltage Regulation (12 V, 5 V and 3.3 V) [± 3%]
- ❖ Cable-free Connection Design
- ❖ Multi-GPU Technology Support

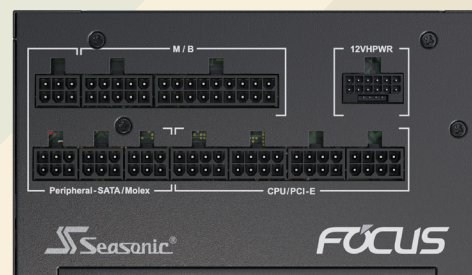

## POWER DISTRIBUTION

Model	+3.3 V	+5 V	+12 V	-12 V	+5 Vsb	Total Power
<b>FOCUS GX-1000</b>	25 A	25 A	83 A	0.3 A	3 A	1000 W
<b>FOCUS GX-850</b>	20 A	20 A	70 A	0.3 A	3 A	850 W
<b>FOCUS GX-750</b>	20 A	20 A	62 A	0.3 A	3 A	750 W



## CONNECTOR QUANTITY

Cable	Main Power (24P / 20P) 610 mm	EPS 12 V / ATX 12 V (8P / 4P) 700 mm	12VHPWR 750 mm	PCI-E (8P / 6P) 750 mm	SATA 950 mm	SATA 3.3 550 mm	Peripheral (4P) 690 mm
<b>FOCUS GX-1000</b>	1	2	1	3	8	2	3
<b>FOCUS GX-850</b>	1	2	1	3	8	2	3
<b>FOCUS GX-750</b>	1	2	1	2	8	2	3



For more information on Cybenetics certifications please visit: [www.cybenetics.com](http://www.cybenetics.com).



Compliance:

Protection Features: OPP / OVP / UVP / SCP / OCP / OTP

Dimensions: 140 mm (L) x 150 mm (W) x 86 mm (H)

Specifications may change without prior notice



**Headquarters** [sales@seasonic.com](mailto:sales@seasonic.com)  
**USA** [ssa.sales@seasonic.com](mailto:ssa.sales@seasonic.com)  
**Europe** [sse.sales@seasonic.com](mailto:sse.sales@seasonic.com)